

# alarm Receiver unit **DAR-080**




## Features

- o 8CH Alarm Receiver Unit
- o Used for Mid-sized Security System, such as Matrix System, PC Control System
- o Alarm activated during absence with Memory LED by Channel
- o Built-in Speaker - Alarm output
- o Alarm can be released only by manual
- o TTL, RS-485/232 Port supported : Can be connected to PC, MATRIX etc.

## Specifications

MODEL	DAR-080
Sensor ch	8Channel
Sensor type	Active High
Graphic	8 CH (Open Collector)
Line output	Relay Output
Alarm signal	Siren Output
Others output	Status of Channel On/Off, Alarm on/off
Control function	Alarm On/Off control, Siren, Channel, Line
Communication	RS-232, RS-485
Communication speed	1200, E, 8, 1 or select 9600, N, 8, 1
Power supply	110/220V AC, 50/60Hz
Power consumption	Max. 18W
Operating Temp	0°C ~ +40°C
Weight	Approx. 3kg
Dimension	200(W) x 280(H) x 72(D)mm

## Dimensions

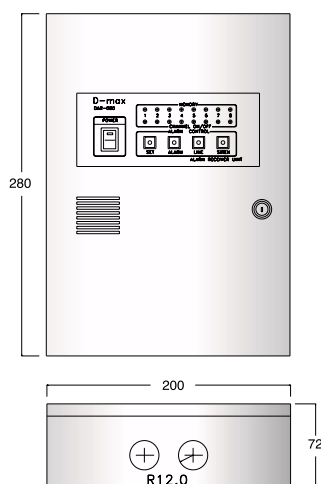

(UNIT : mm)